

RADIAN MICROWEDGE SERIES: 8" TWO-WAY STAGE MONITOR SYSTEM

The Radian RMW-1108 is comprised of an 8" woofer with a 1" compression driver that is capable of handling 200 watts RMS. The smallest of the patented* MicroWedge™ products, the RMW-1108, weighs in at just 21 lbs. despite utilizing the exact same robust construction methods and materials as the 12" and 15" MicroWedge™ systems.

Although it is only half the size of the 12" RMW-1122, the RMW-1108 maintains the same sonic signature of the larger MicroWedge™ systems, offering a smooth frequency response, low distortion, and an even, wide dispersion from a single, coherent point source. The powerful, new 8" addition to the MicroWedge™ series is rated at 200W RMS with a sensitivity of 95dB (1W/1m) and provides uniform coverage through its nominal 90 degree conical dispersion.

The frequency response of the new 8" wedge monitor, 100Hz to 20kHz, makes the RMW-1108 ideal for use in corporate and house-of-worship applications. The system's specification also lends itself to applications such as onstage monitoring of vocals, keyboards, guitars, brass and other instruments in broadcast and smaller touring or installed sound reinforcement systems.

Like the RMW-1122 12" and the RMW-1152 15" MicroWedge™ systems, the RMW-1108 incorporates a front port for concealed cable management, with two parallel Speakon connectors. An additional, rear-mounted Speakon connector allows the 8" RMW-1108 to be used as a meterbridge - mounted speaker on front-of-house and monitor consoles.

*Patent #8D-60220



Relative size comparison

- ✓ **LOW PROFILE DESIGN**
- ✓ **ARRAYABLE**
- ✓ **200W RMS**
- ✓ **ONLY 21 LBS.!**
- ✓ **ONLY 9" x 11.75" x 14"**
(229 x 299 x 356 mm)


RADIAN MICROWEDGE SERIES: 8" TWO-WAY STAGE MONITOR SYSTEM

SPECIFICATIONS

FREQUENCY RESPONSE	100 Hz – 20 kHz
POWER HANDLING	200 watts RMS
SENSITIVITY*	95 dB
IMPEDANCE**	P = 8 ohms
NOMINAL DISPERSION	90° Conical
DIMENSIONS (HWD)	9" x 11.75" x 14", 229 x 299 x 356 mm
ENCLOSURE CONSTRUCTION	3/4" 13-ply Baltic birch with handle
INPUT CONNECTORS	Neutrik NL4 Speakon
STANDARD FINISH	Scratch-proof, waterproof Duradian™
NET WEIGHT	21 lbs., 9.6 kg
SHIPPING WEIGHT	23 lbs., 10.5 kg

*One Watt, One Meter

**P = Passive only

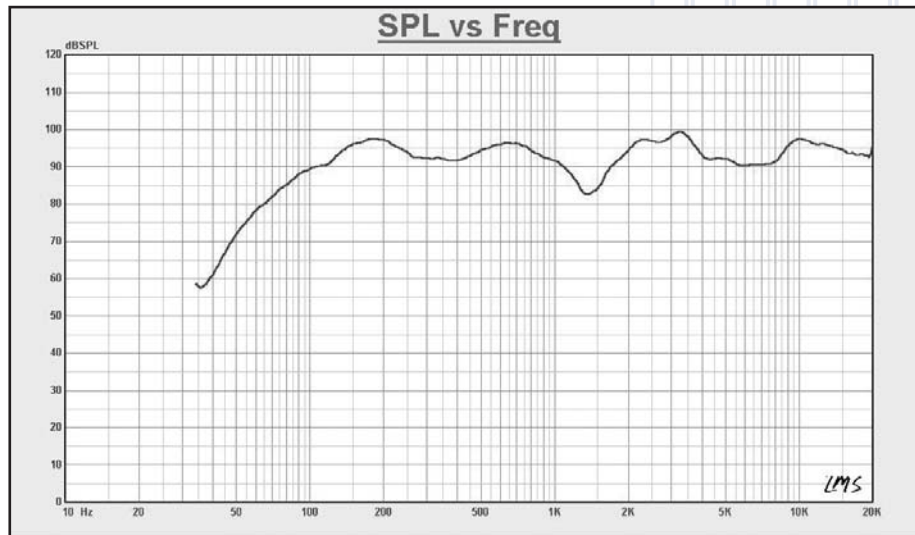

Specifications subject to change without notice.

LIMITED WARRANTY

Radian Audio Engineering, Inc. products, when sold domestically, are guaranteed for a period of five (5) years from the date of original purchase against malfunctions due to defects in workmanship. If such a malfunction occurs, the product will be repaired or replaced at our option, without charge, if delivered prepaid to the factory. Product will be returned prepaid via ground transport. This warranty does not extend to damage resulting from improper installation, misuse, neglect or abuse. The warranty does not apply to external finish or appearance. The warranty does not apply to burnt voice coils. In no event shall Radian Audio Engineering, Inc. be liable for incidental or consequential damages including, without limitation, injury to persons or property or loss of use.

Radian Audio Engineering, Inc.
600 N. Batavia Street
Orange, CA 92868
Phone: (714) 288-8900
Fax: (714) 288-1133
E-mail: info@radianaudio.com
Web: www.radianaudio.com