

Radian's Professional Series two-way full-range coaxial loudspeaker systems are designed specifically for touring / portable sound systems. The RPX-110P-V is a single two-way passive coaxial loudspeaker system loaded with an 10" low-frequency woofer and 1" exit compression driver.


Unlike traditional multi-way loudspeaker systems that employ separate low frequency speakers with compression driver/horn combinations, Radian coaxial loudspeaker systems present all frequencies to the audience from one coherent source. This single-point source system eliminates the problem often associated with "time smear" in which the sound coming from the low-frequency component arrives at the listener's ear earlier or later than the sound emanating from the horn/driver combination.

Radian loudspeaker systems' conical dispersion patterns utilize the low-frequency cone as an extension of the high-frequency compression driver to provide clean, transparent reproduction of both music and speech with lower distortion than most asymmetrical high-frequency horns.

Radian RP Series full-range loudspeaker system enclosures have 20 degree sides and are trapezoidal in shape. Construction is of 3/4" 13-ply Baltic birch with perforated steel grills. All systems have dual/parallel Neutrik NL4 Speakon input connectors. They are protected by Radian's exclusive scratch-resistant, waterproof Duradian™ finish.



- ✓ TRUE POINT SOURCE
- ✓ 375 WATTS AES  
750 WATTS PROGRAM
- ✓ 90° CONICAL DISPERSION
- ✓ HIGH SENSITIVITY
- ✓ LOW DISTORTION

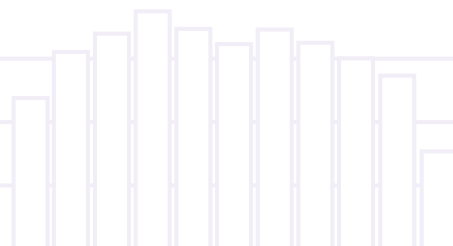

# RPX-110P-V




PROFESSIONAL SERIES: 10" TWO-WAY ARRAYABLE LOUDSPEAKER SYSTEM

## SPECIFICATIONS

FREQUENCY RESPONSE .....	46 Hz – 18 kHz
POWER HANDLING .....	375 watts AES/750 watts Program
SENSITIVITY * .....	96 dB
IMPEDANCE .....	8 ohms
MAX SPL .....	121 dB continuous, 128 dB peak
NOMINAL DISPERSION .....	90° Conical
DIMENSIONS (HWD) .....	19-1/4" x 12-1/2" x 13" 489 x 318 x 330 mm
ENCLOSURE CONSTRUCTION .....	3/4" 13-ply Baltic birch with perforated steel grills, handle and bottom pole cup mount
INPUT CONNECTORS .....	Dual/parallel Neutrik NL4 Speakon
FLY POINTS .....	Ten 3/8"-16
STANDARD FINISH ..	Scratch-proof, waterproof black Duradian™ finish
NET WEIGHT .....	36.6 lbs., 16.6 kg
SHIPPING WEIGHT .....	43 lbs., 19.5 kg

\*one watt, one meter

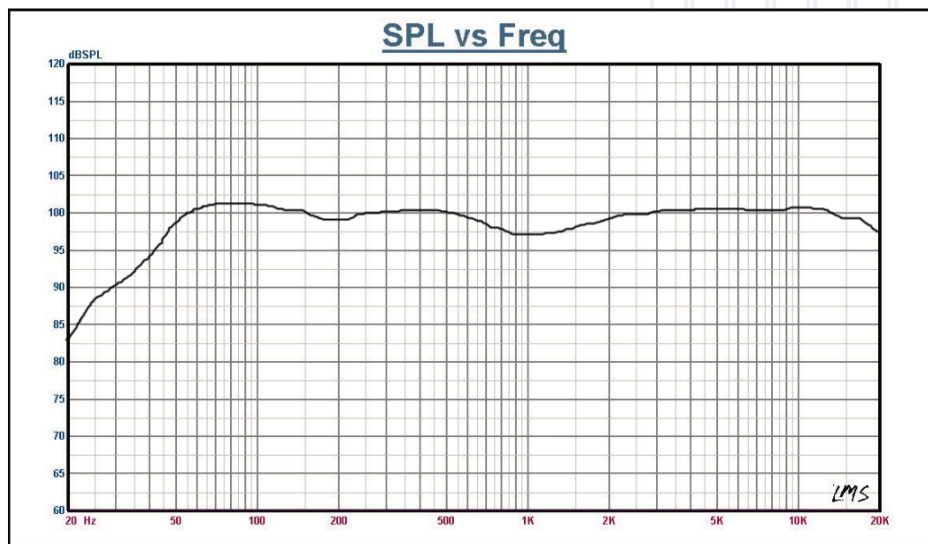

Specifications subject to change without notice.

### LIMITED WARRANTY

Radian Audio Engineering, Inc. products, when sold domestically, are guaranteed for a period of five (5) years from the date of original purchase against malfunctions due to defects in workmanship. If such a malfunction occurs, the product will be repaired or replaced at our option, without charge, if delivered prepaid to the factory. Product will be returned prepaid via ground transport. This warranty does not extend to damage resulting from improper installation, misuse, neglect or abuse. The warranty does not apply to external finish or appearance. The warranty does not apply to burnt voice coils. In no event shall Radian Audio Engineering, Inc. be liable for incidental or consequential damages including, without limitation, injury to persons or property or loss of use.

600 N. Batavia Street  
Orange, CA 92868  
Phone: (714) 288-8900  
Fax: (714) 288-1133  
E-mail: [radian@radiaudio.com](mailto:radian@radiaudio.com)  
Web: [www.radiaudio.com](http://www.radiaudio.com)